

FIG. 5

3/25



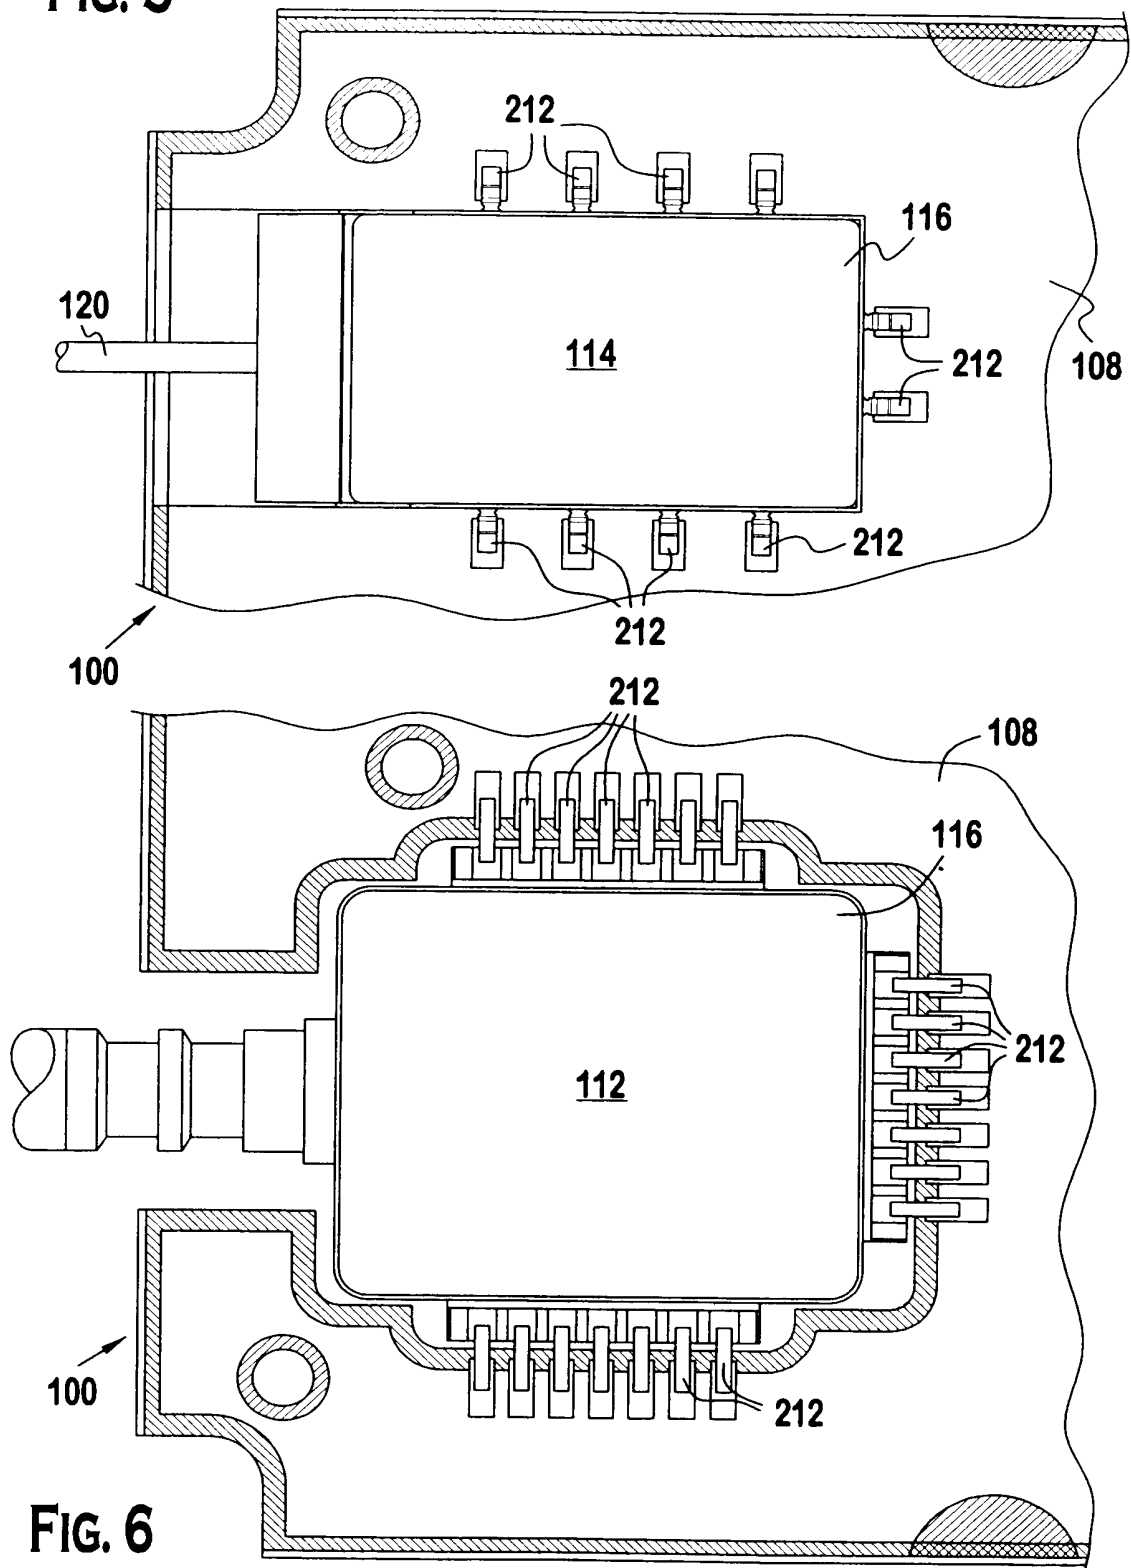


FIG. 6

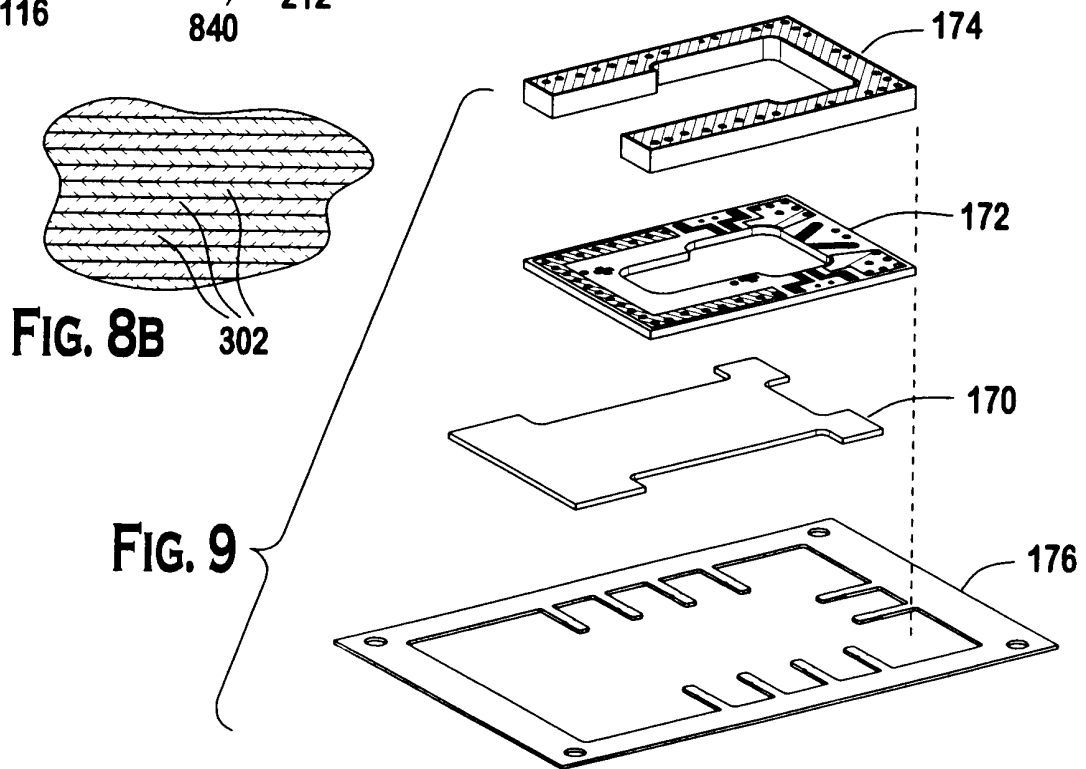


5/25

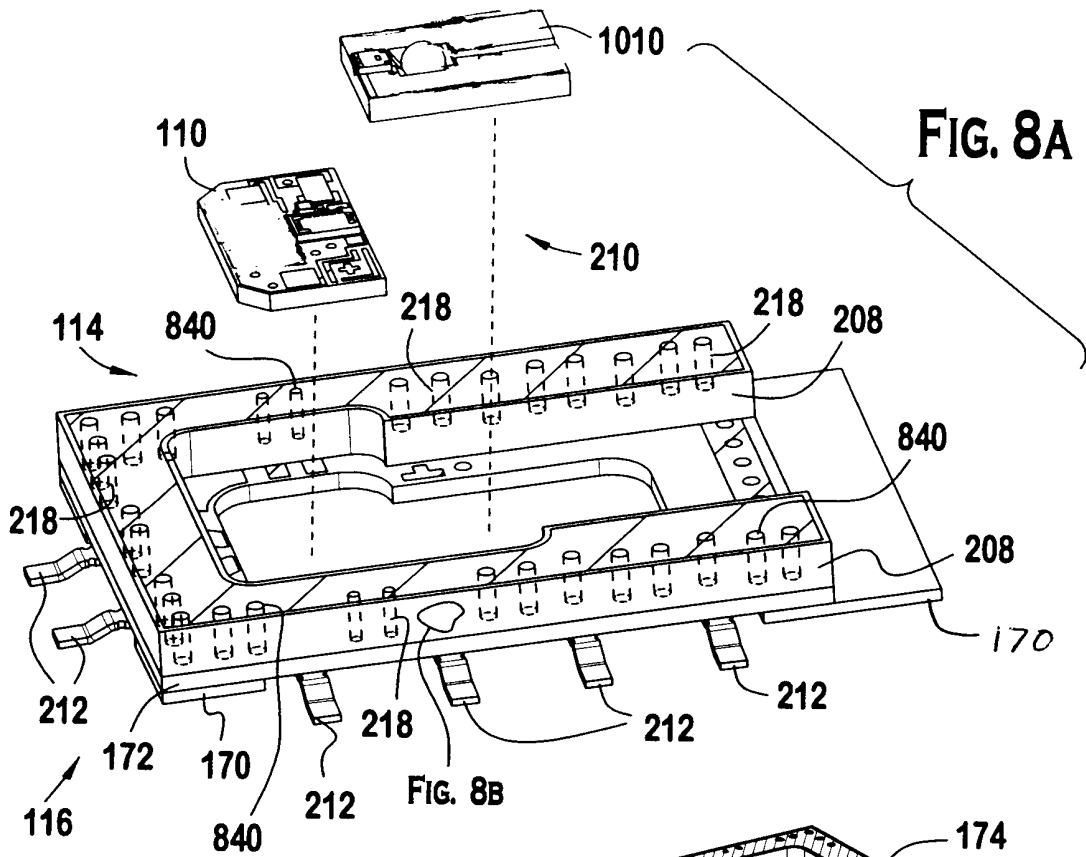


6/25

**FIG. 10**

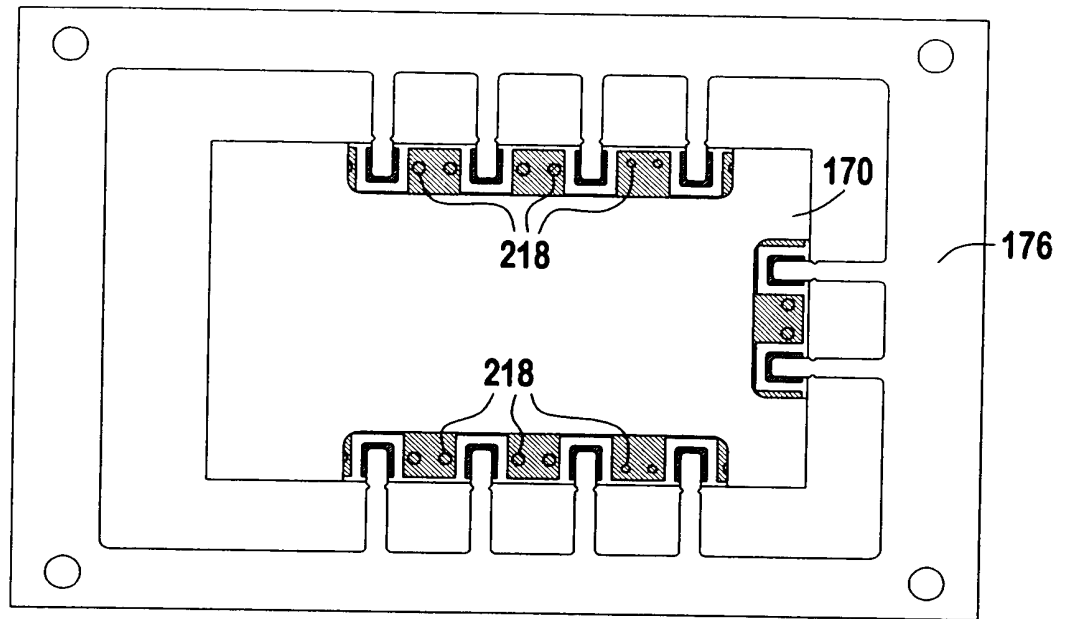

**FIG. 11**

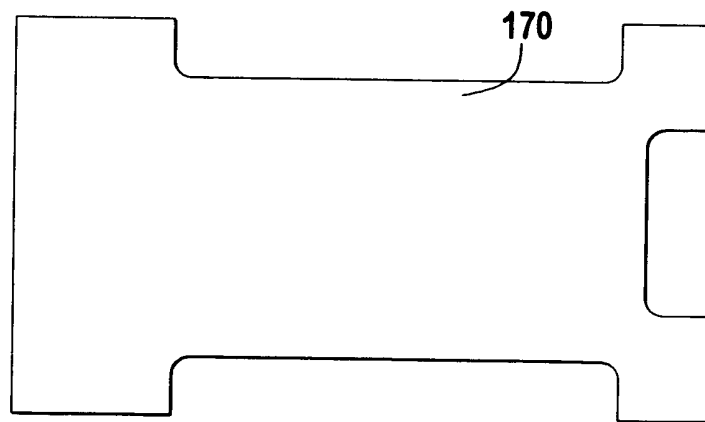

7/25

FIG. 12



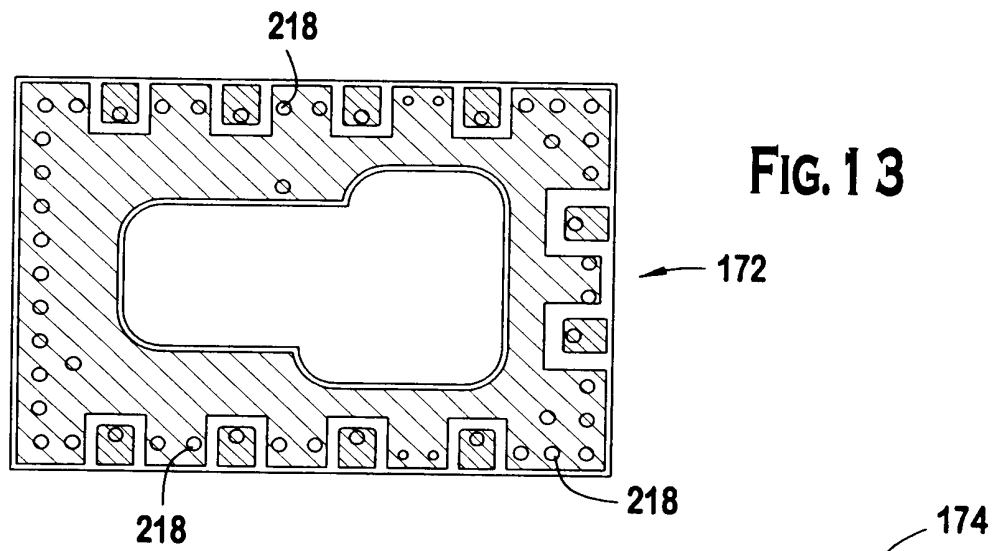


FIG. 13

FIG. 14

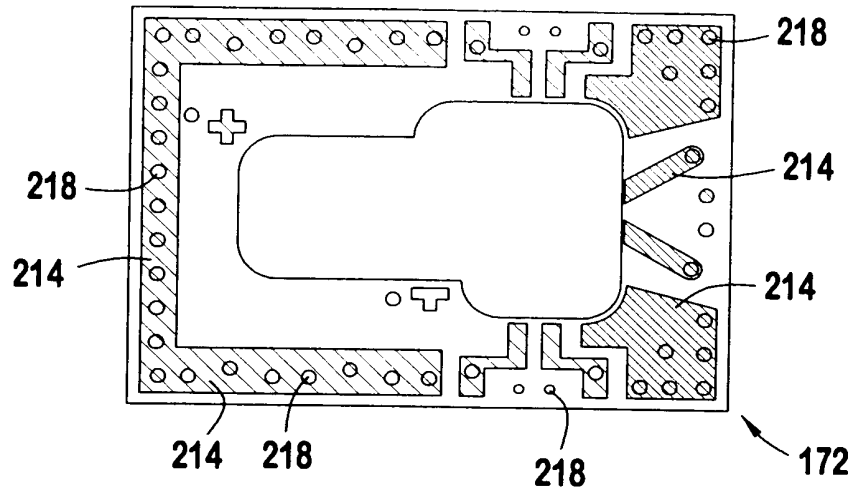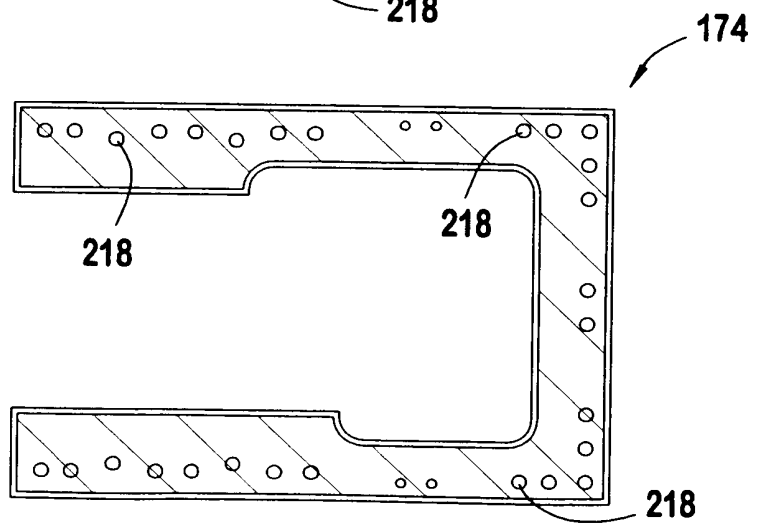

8/25

FIG. 15


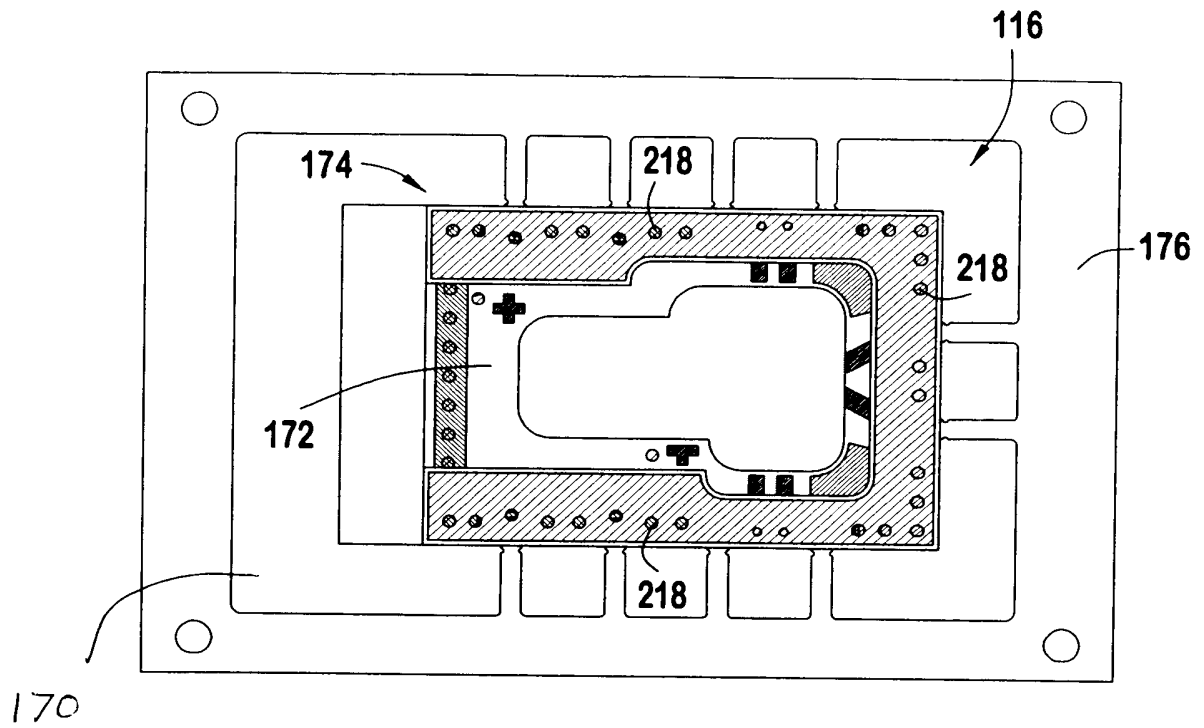


FIG. 16



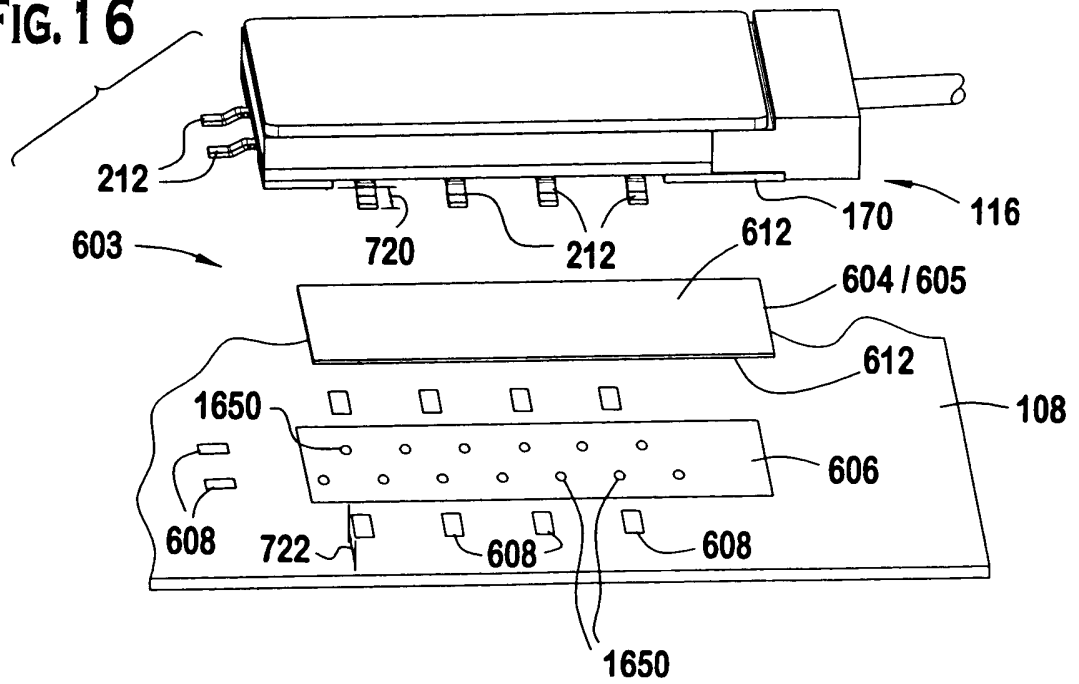

7/25

FIG. 17A


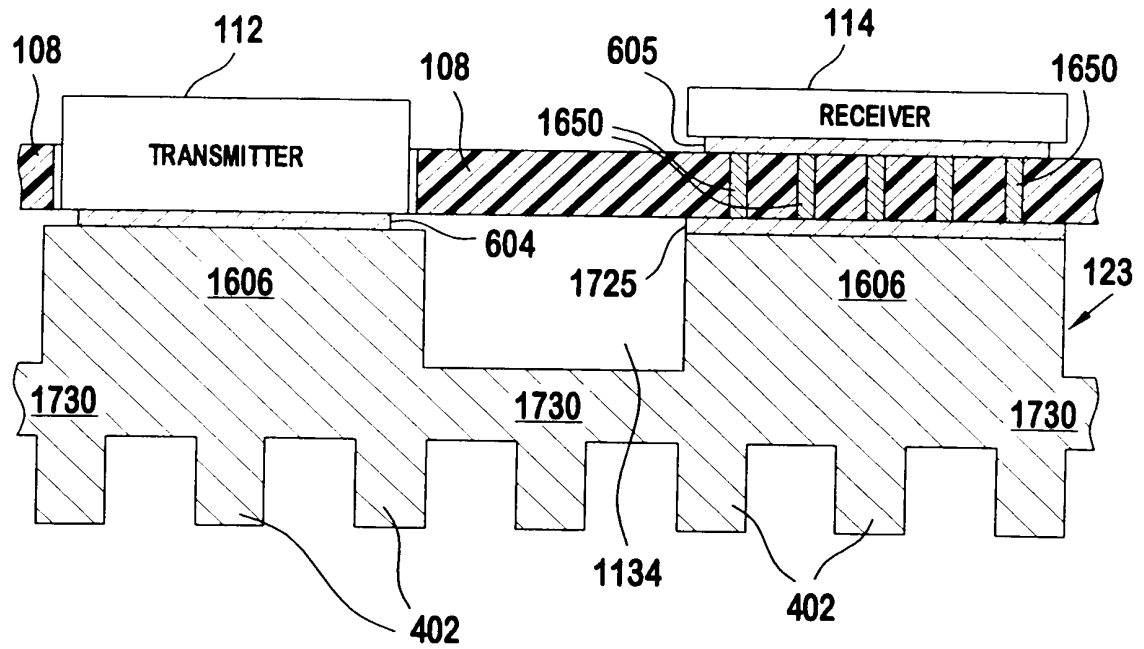


FIG. 17B

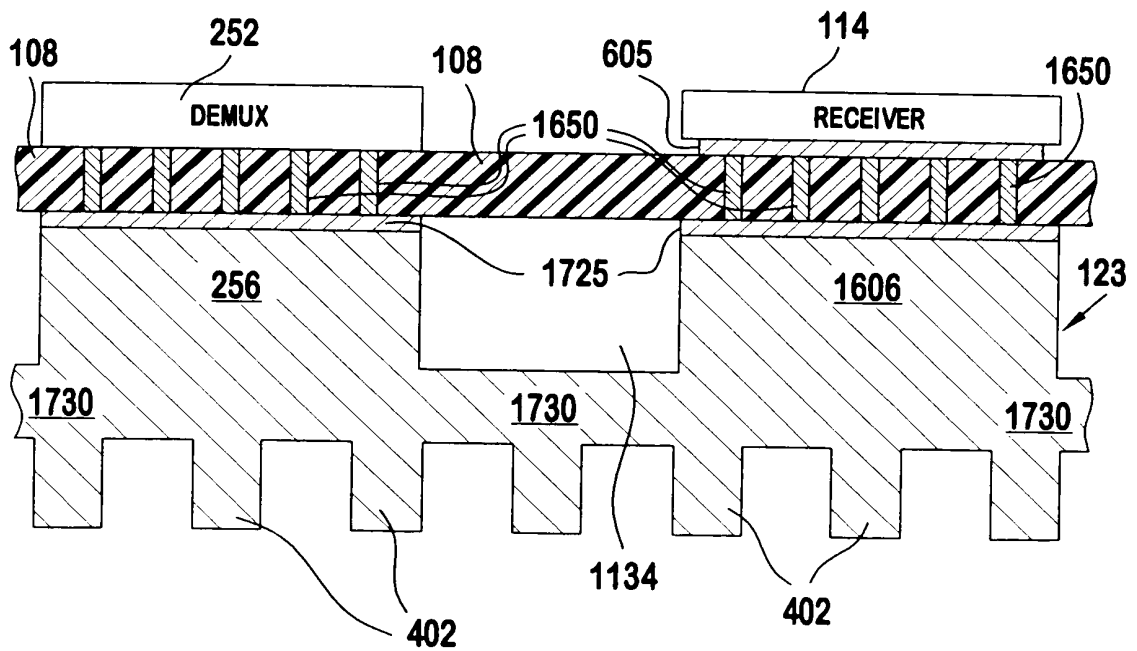

10/25

FIG. 18



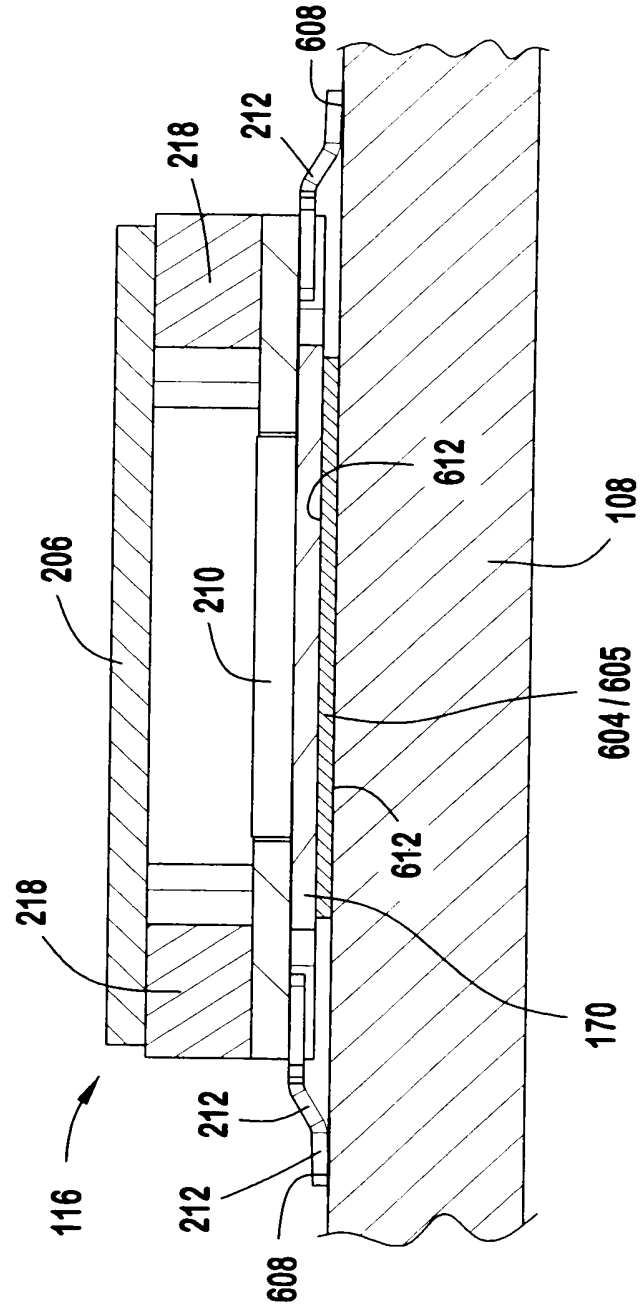


Fig. 9 is a perspective view of a second embodiment of a device. It shows a rectangular block 900 with a tapered section 902. A base 904 is at the bottom. A slot 910 is cut into the base, and a component 912 is shown within it. Another component 910 is shown below the slot.

**FIG. 19B**

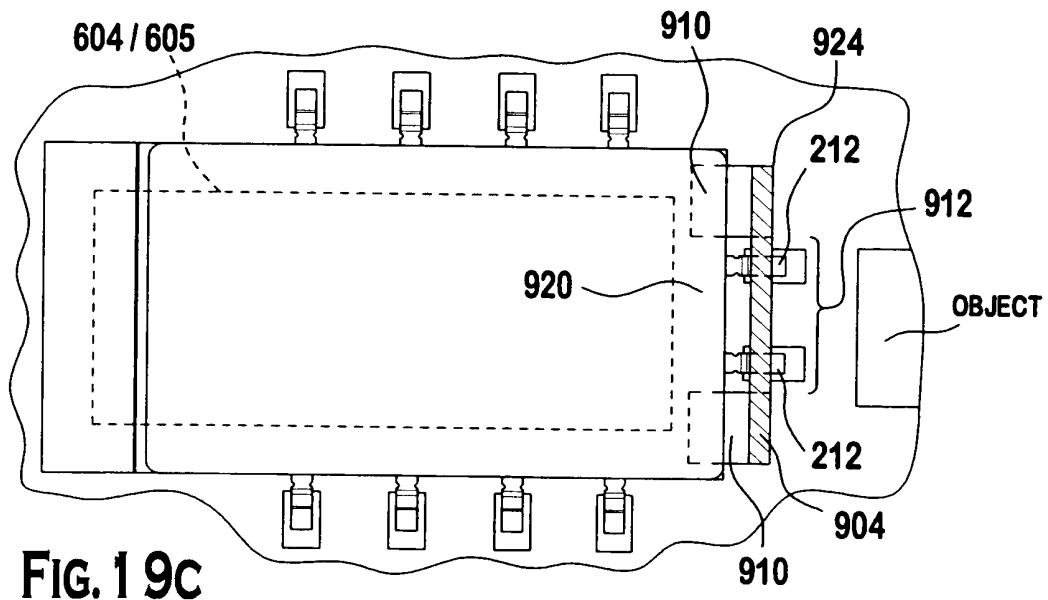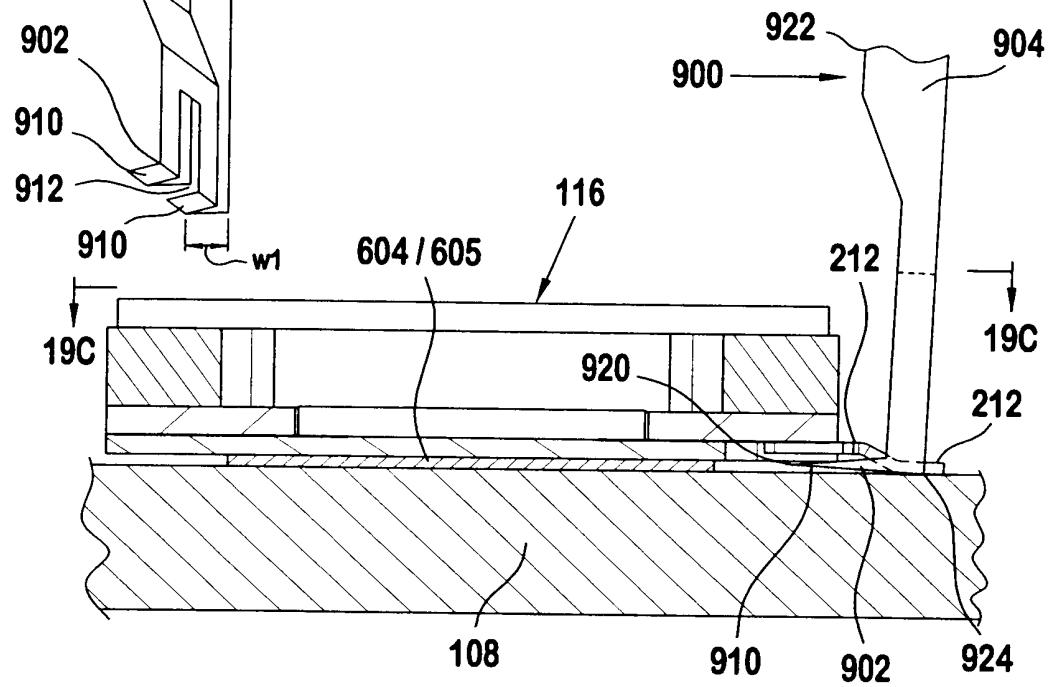

12/25

FIG. 20B



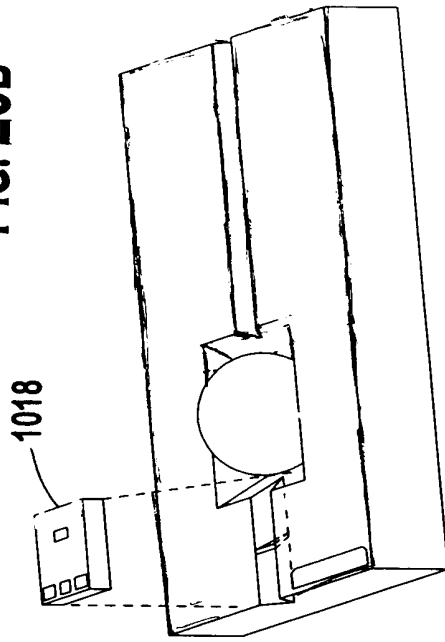



FIG. 20A

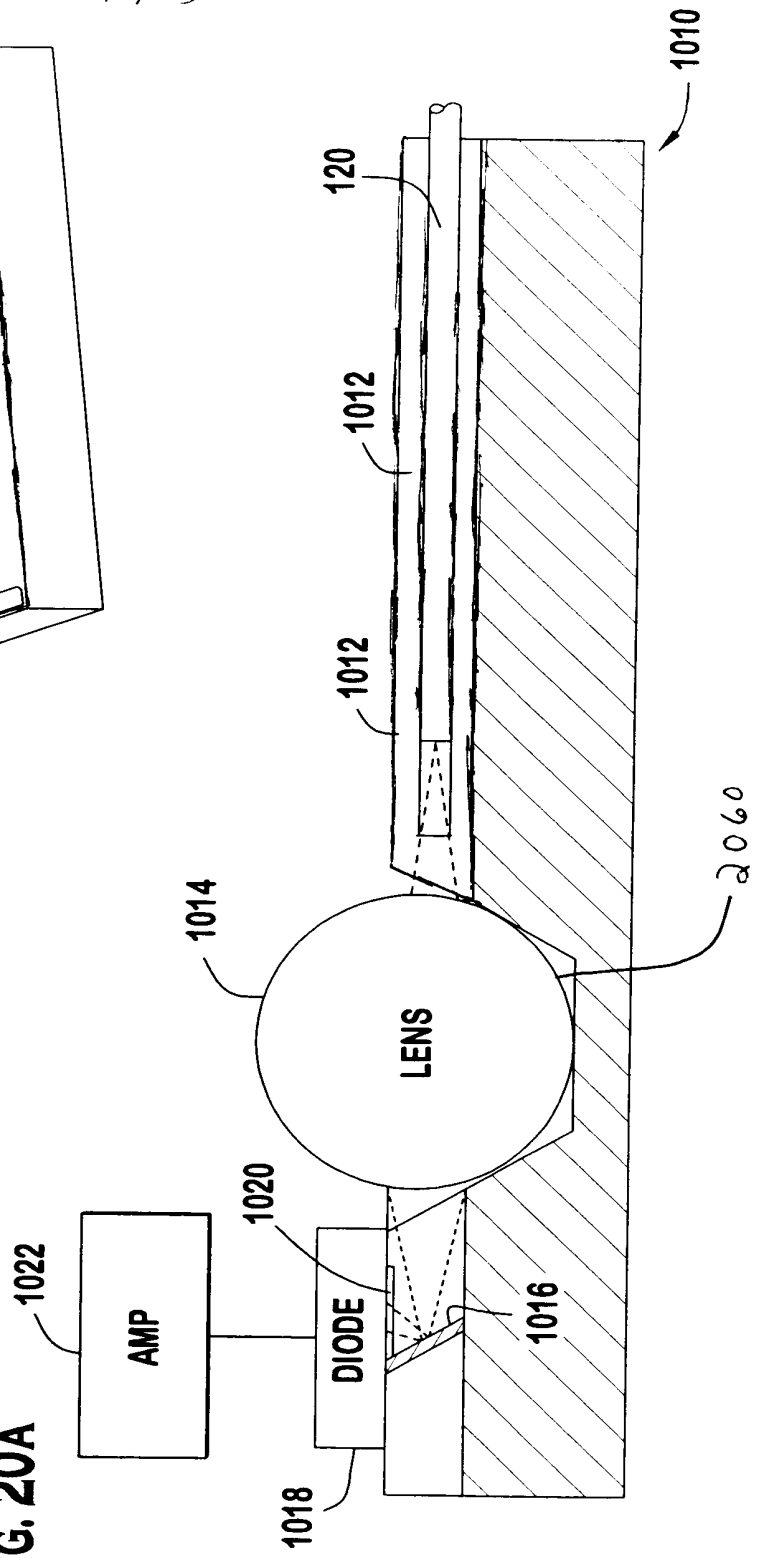



14/25

FIG. 22B

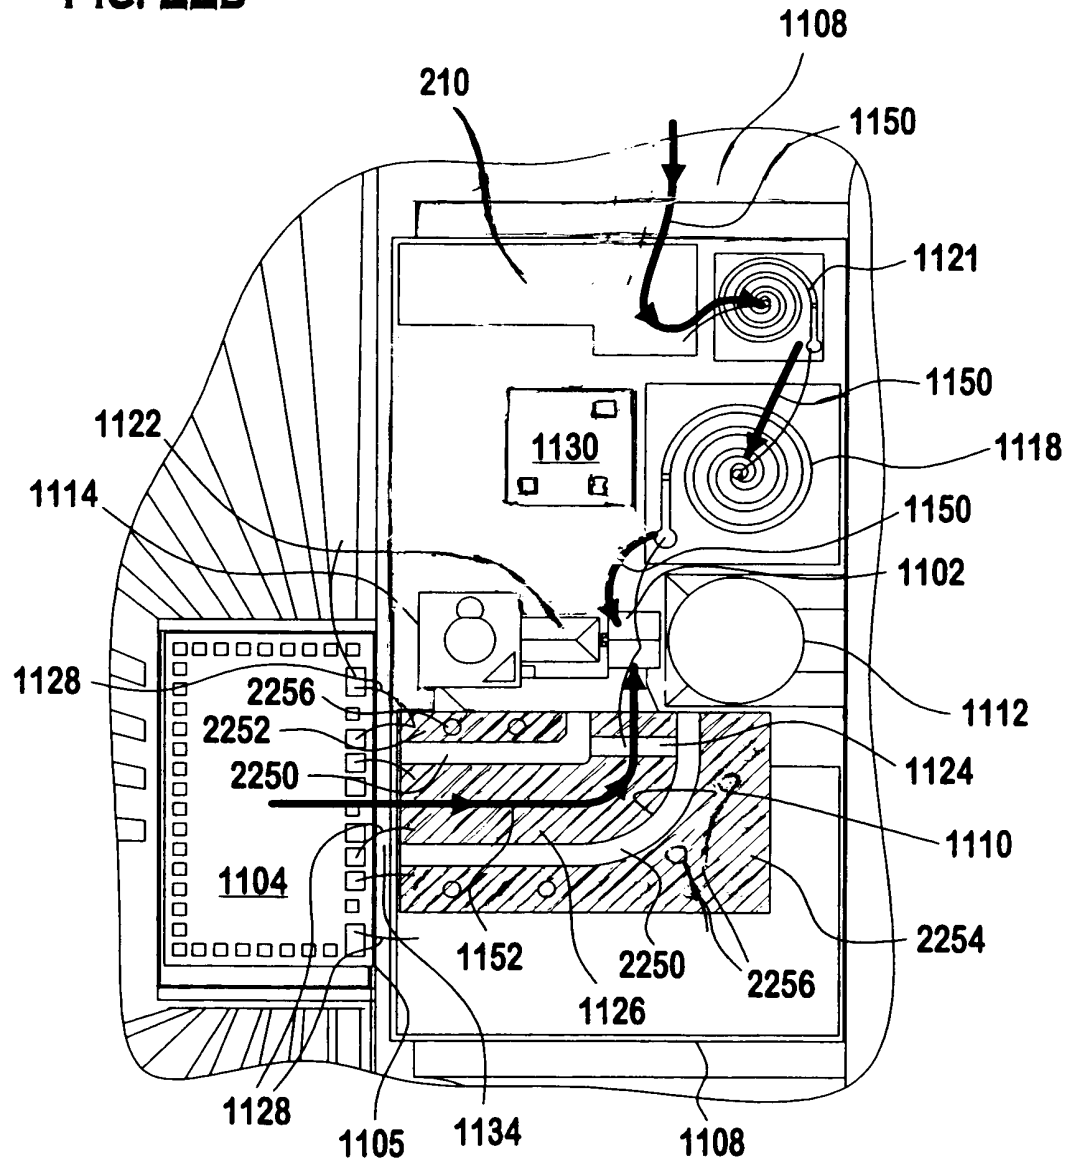


FIG. 22C


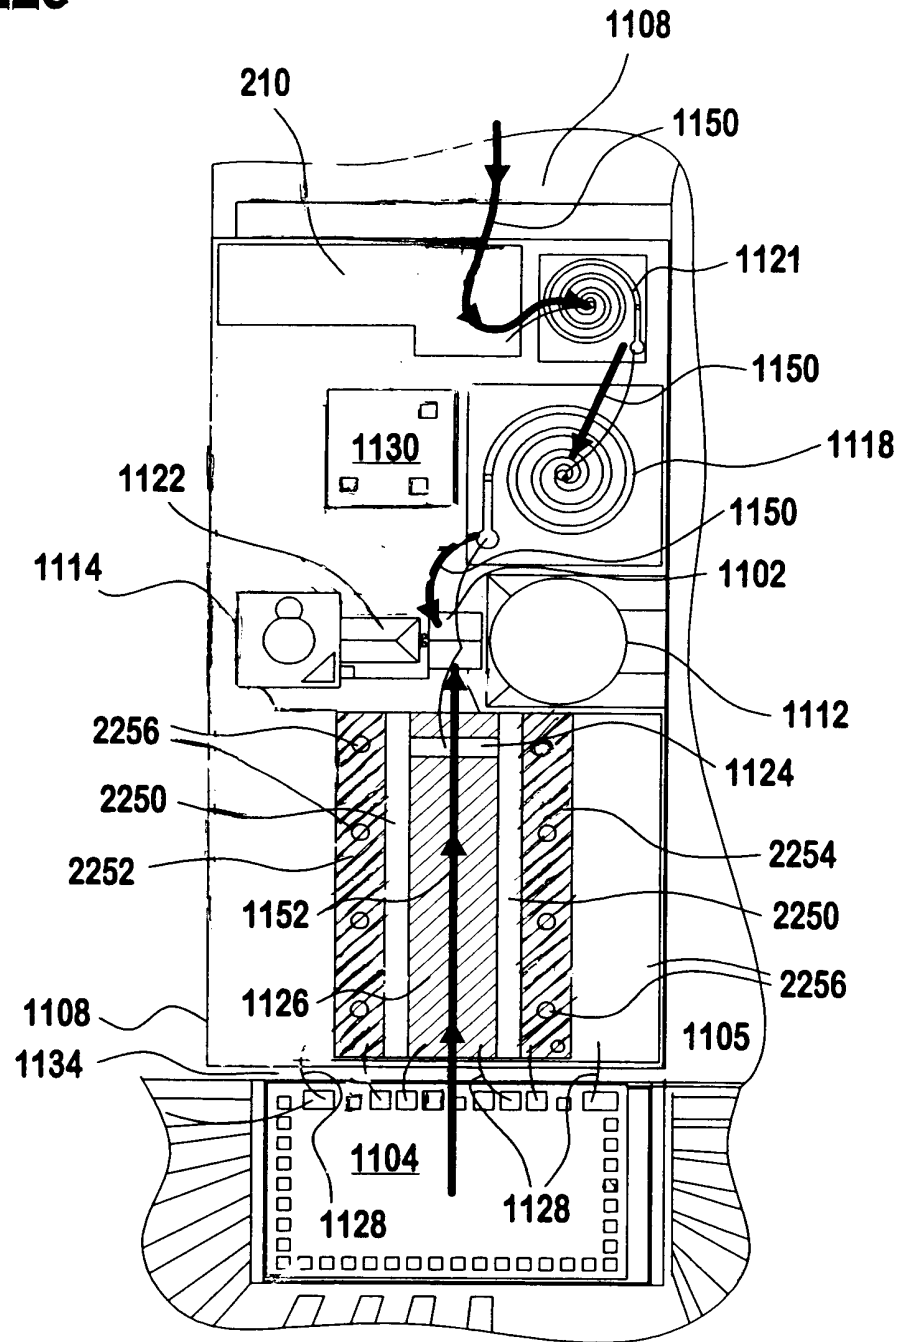


FIG 22D



16/25

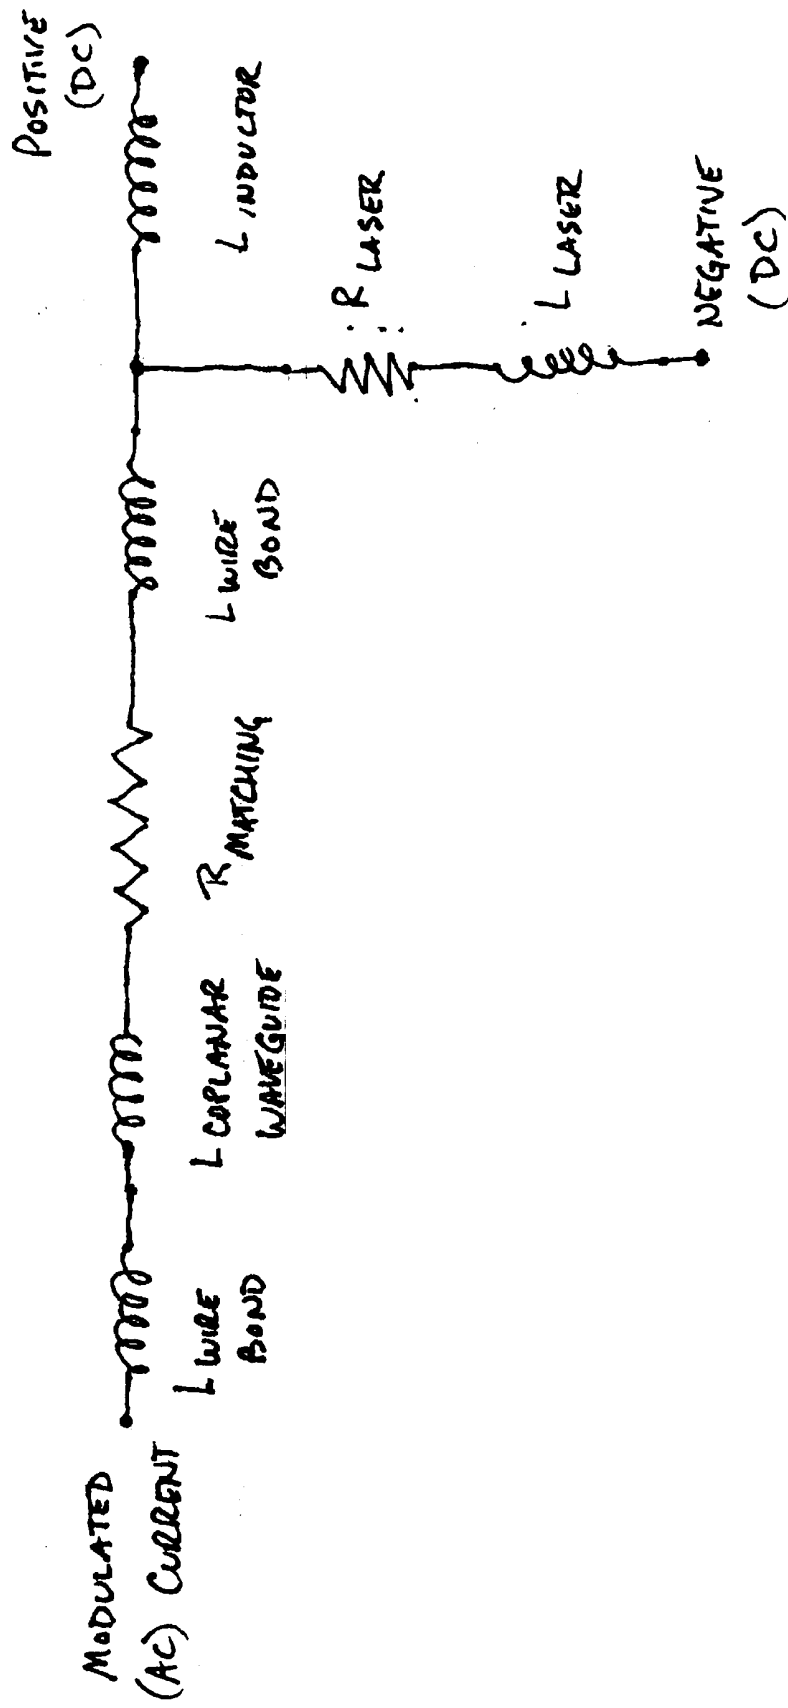

17/25

TEMP<sub>CURVE 1</sub> > TEMP<sub>CURVE 2</sub> > TEMP<sub>CURVE 3</sub>

FIG. 23



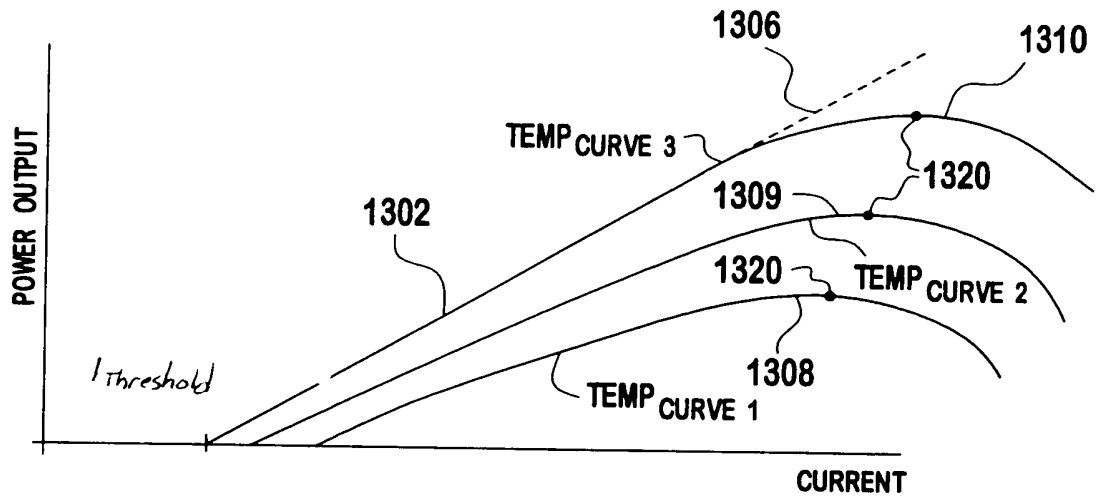



FIG. 24

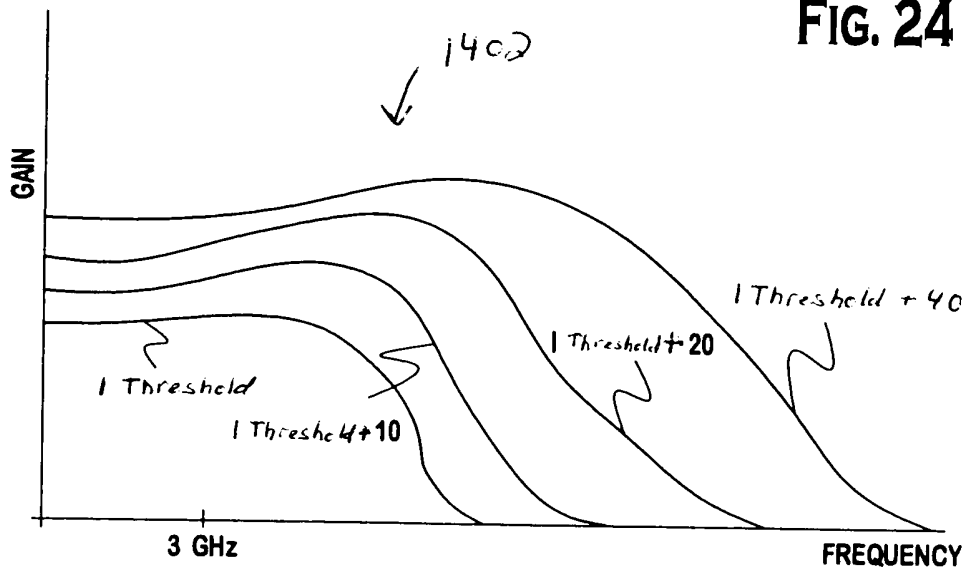

**FIG. 25**

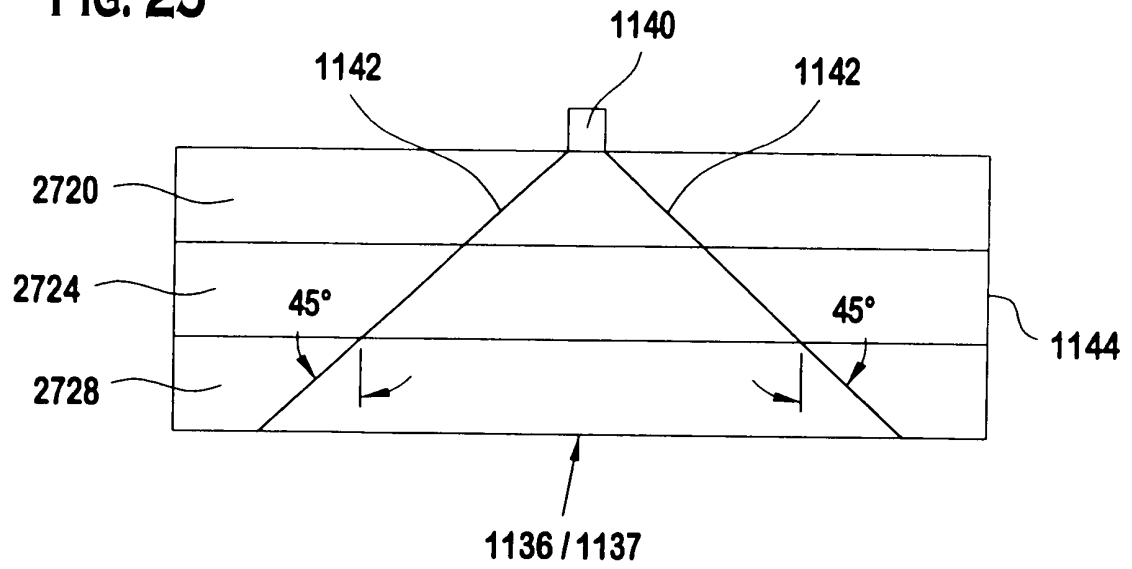


**FIG. 26**

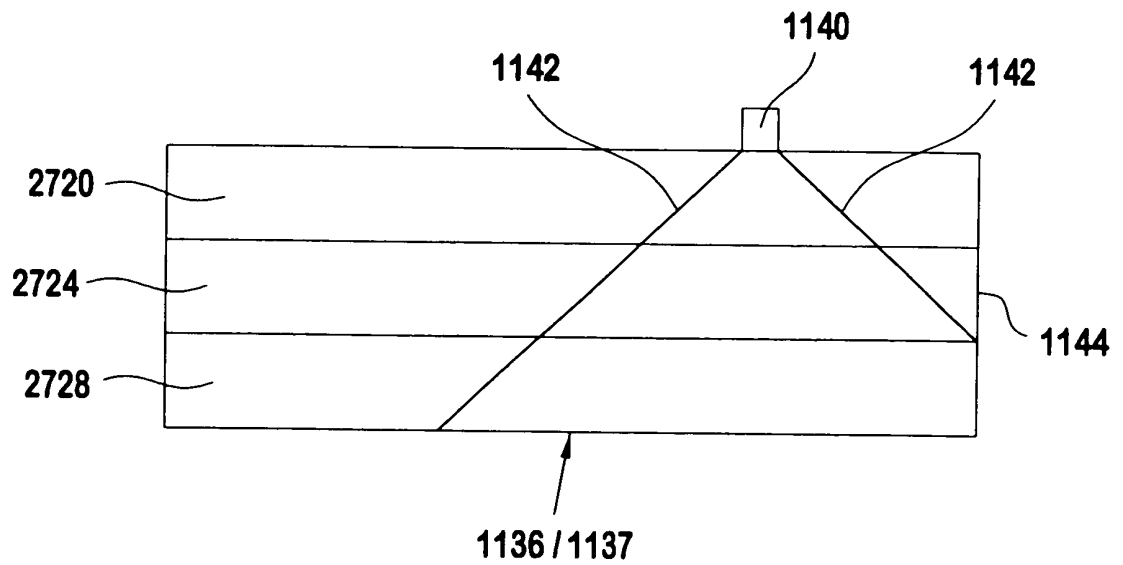


19/25


**FIG. 27A**

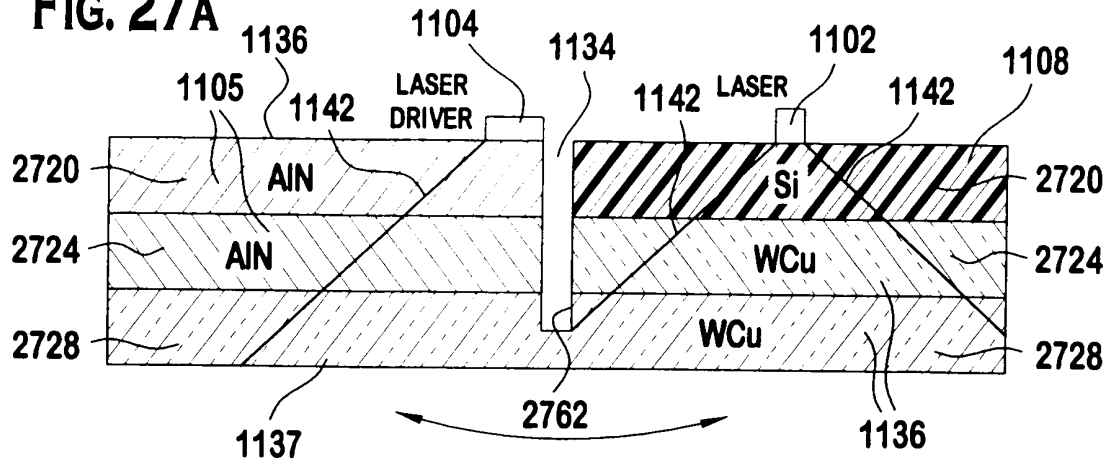


**FIG. 27B**

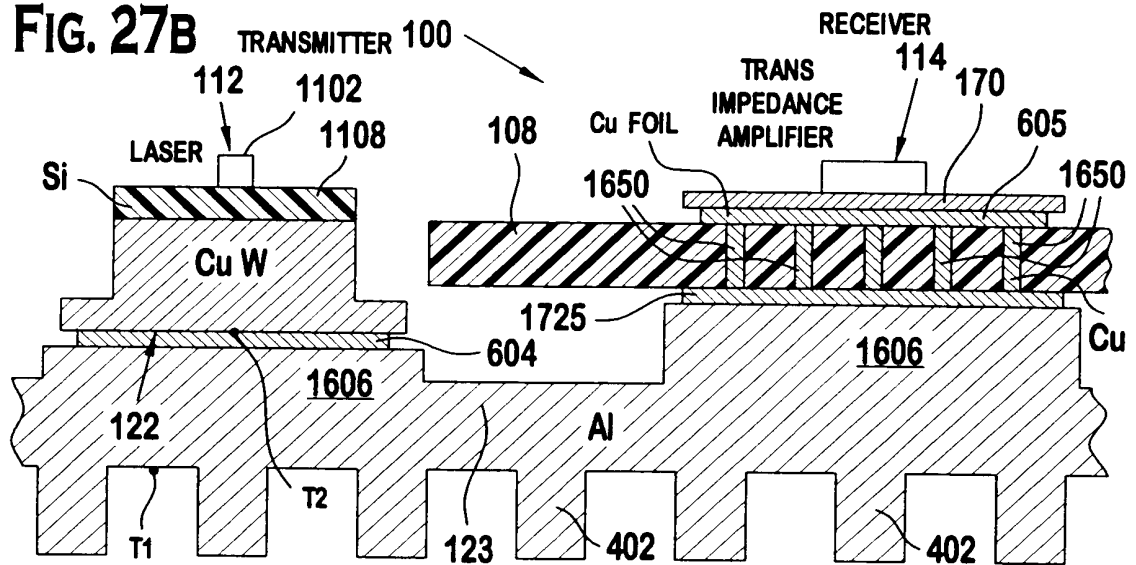


**FIG. 27C**

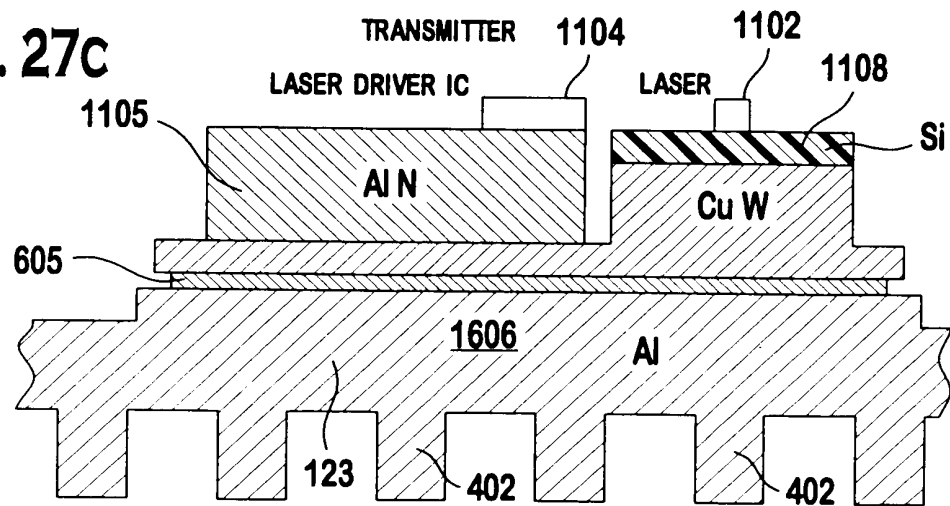


**FIG. 28**

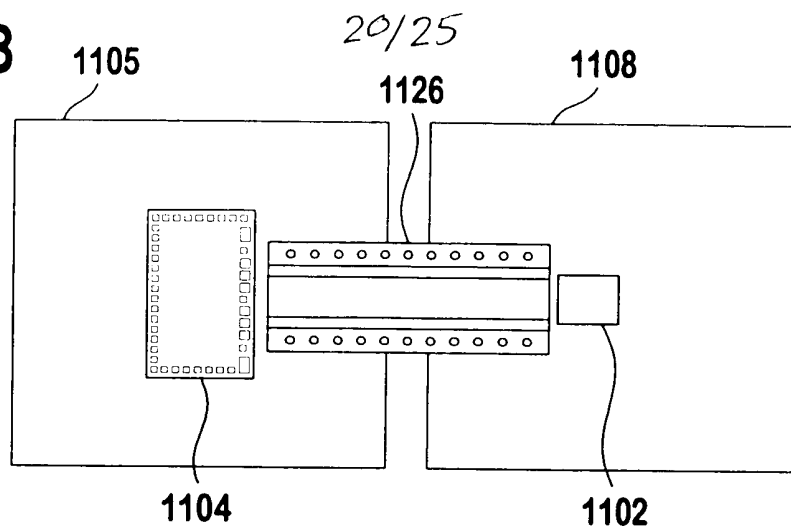

**FIG. 29**

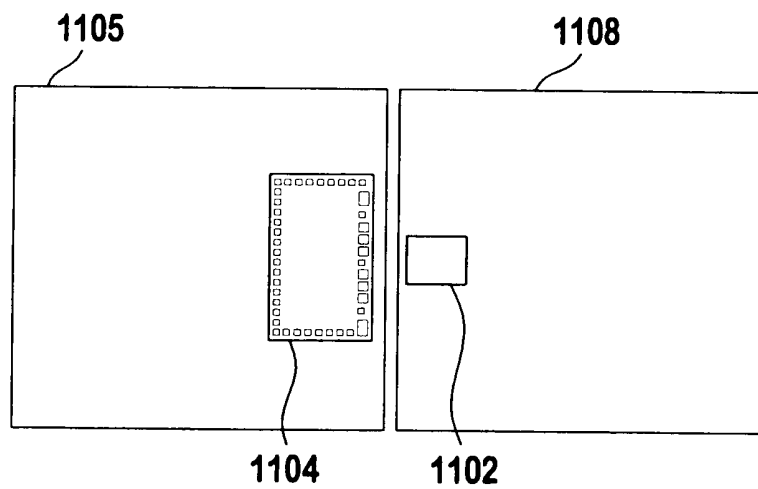

**FIG. 30**

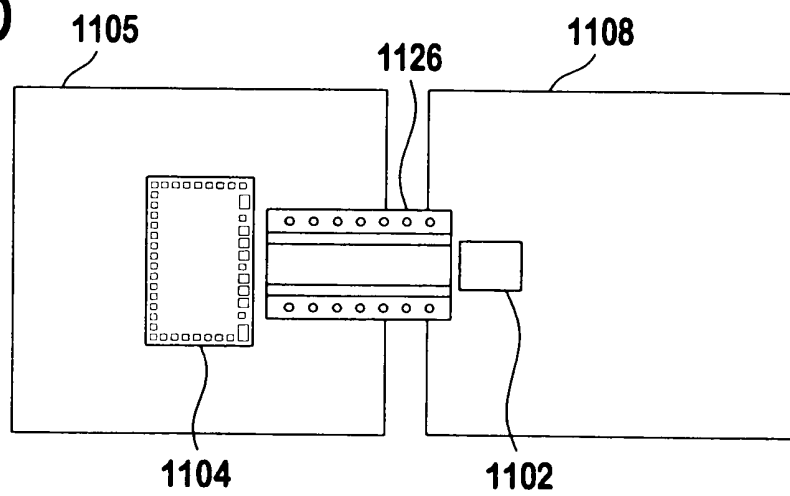




**FIG. 31****FIG. 32**



FIG. 34



FIG. 37

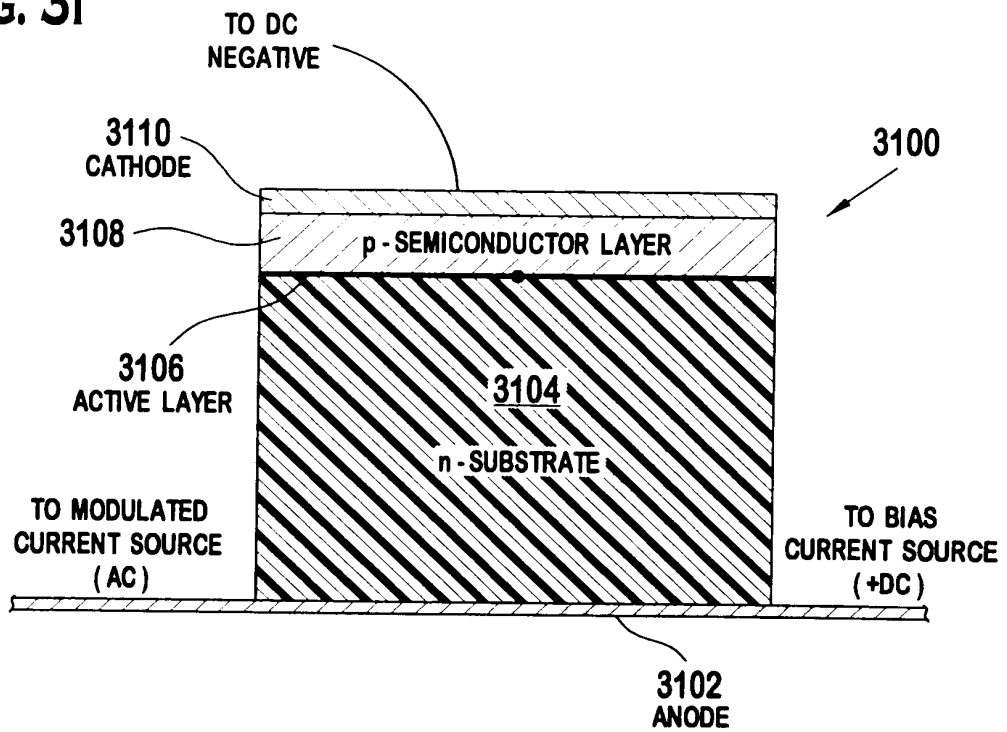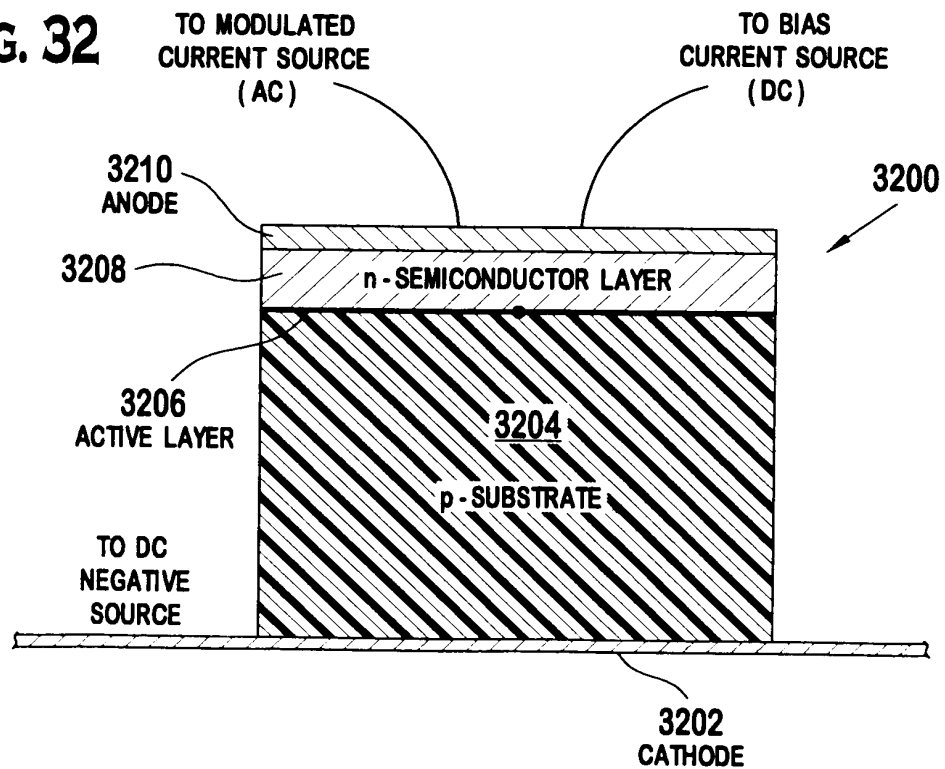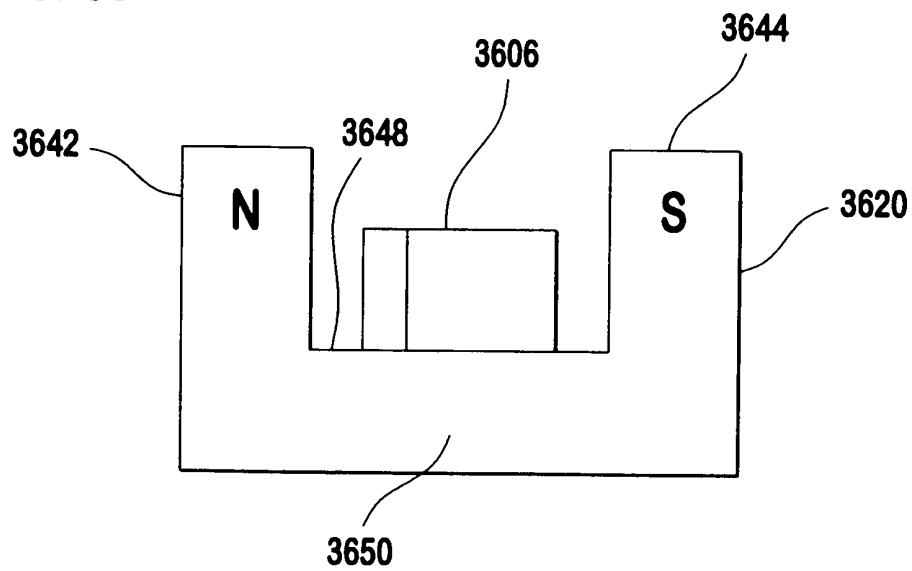

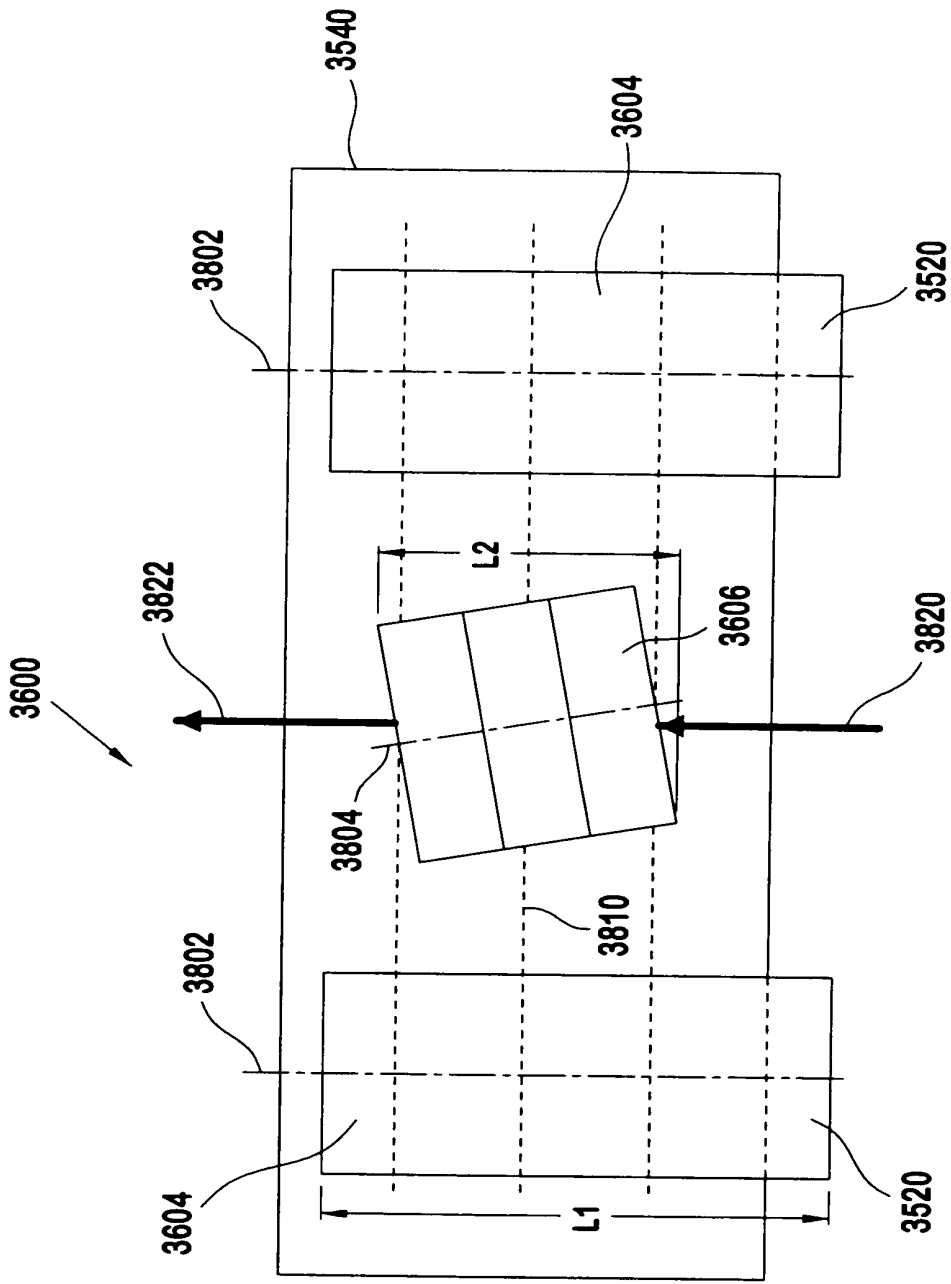


FIG. 35



